

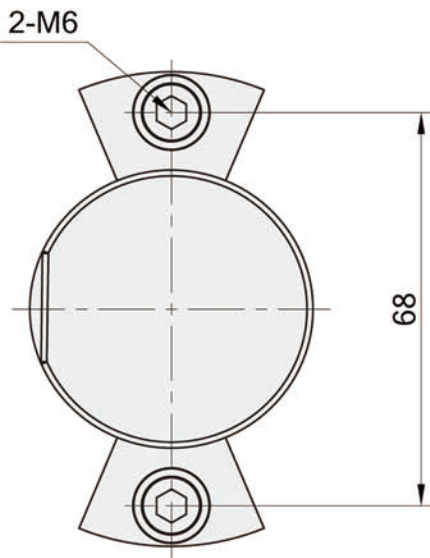


Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

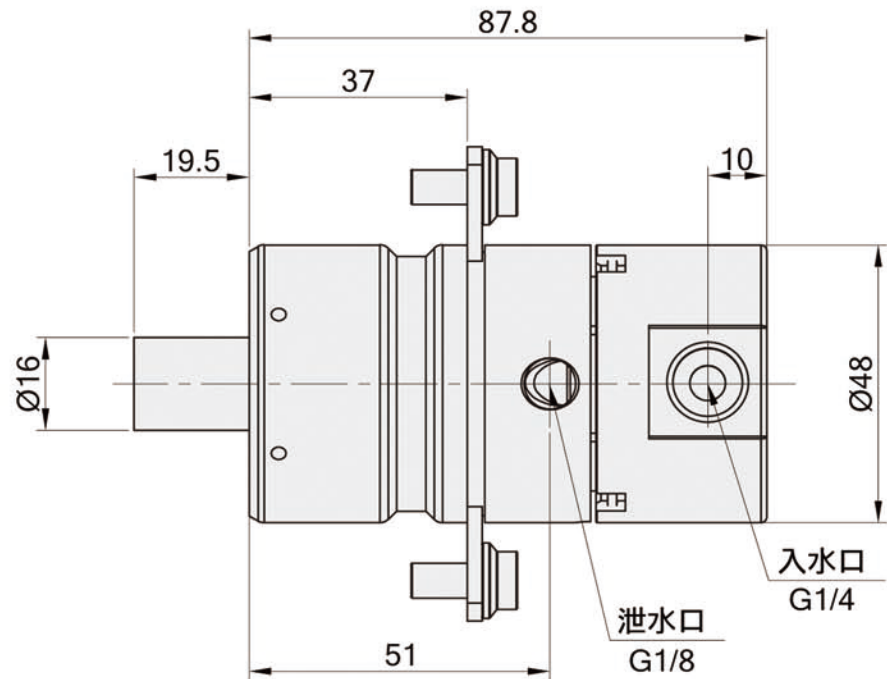


徑向入水

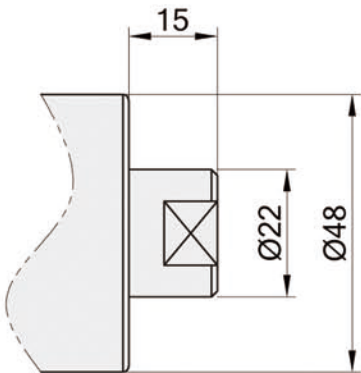

軸向入水

技术参数：
最高转速：36000rpm
最高温度：125℃
工作压力：150BAR
介质：气 切削液
最大气压：5Bar

THIRD ANGLE PROJECTION:



Drawn	JSM	6/2/03	TOLERANCE EXCEPT AS NOTED
Checked	PJE	13/43/05	x.x ±.125
Checked	PJE	11/36/08	x.xx ± 0.15
CUSTOMER APPROVAL/DATE:			x.xxx ± 0.005
			ANGLES ± 0.5°
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES,INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY			SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE
			SHAFT MEL/PLTING: CARBON STL BLK OXIDE

HIDNEY 深圳市欣德利机电设备有限公司 TEL:0755-27222664	
CUSTOMER: STOCK	
P/N:	REV: A 4