

MGO12000-SERIES

单通道高速旋转接头





产品特点: PRODUCT CHARACTERISTICS

- 平衡式机械密封, 密封性能好, 无泄露, 寿命长
- 双列高精度进口球轴承排列, 运行平稳
- 适应多种设备, 单一输送水 气 油等介质

工作参数: WORKING PARAMETERS

- 通道数: 1通路
- 最大正压: 7MPA
- 真空压力: -1.5KPA
- 最高转速: 12000RPM
- 材 质: 不锈钢/铝合金
- 工作温度: -40°C~+125°C

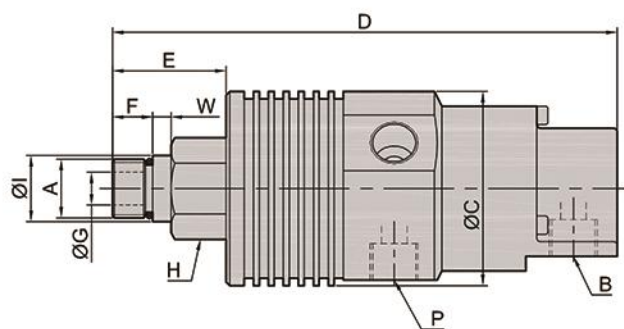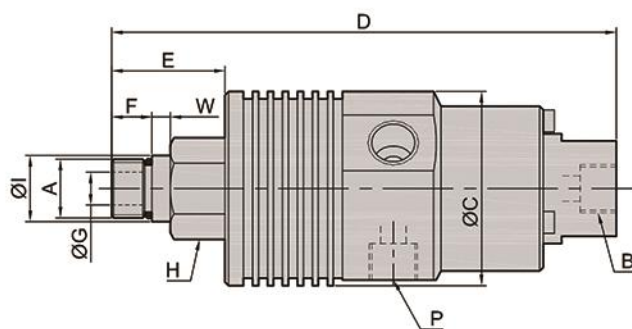

型号 Model	B mm	C mm	D mm	P mm	A mm	E mm	F mm	G mm	H mm	I mm	W mm
MGH01200014LH	G1/4	53	138	G1/4	M16X1.5LH	31	11	9	24	18	5
MGH01200014RH	G1/4	53	138	G1/4	M16X1.5RH	31	11	9	24	18	5
MGH012000P14LH	PT1/4	53	138	G1/4	M16X1.5LH	31	11	9	24	18	5
MGH012000P14RH	PT1/4	53	138	G1/4	M16X1.5RH	31	11	9	24	18	5
MGH012000P38LH	PT3/8	53	138	G3/8	M16X1.5LH	31	11	9	24	18	5
MGH012000P38RH	PT3/8	53	138	G3/8	M16X1.5RH	31	11	9	24	18	5

MG035-SERIES

单通道高速旋转接头

产品特点:

PRODUCT CHARACTERISTICS

- 平衡式机械密封, 密封性能好, 无泄露, 寿命长
- 双列高精度进口球轴承排列, 运行平稳
- 适应多种设备, 单一传送气 水 油等介质
- 最高转速: 2000RPM





安全



美观



可靠

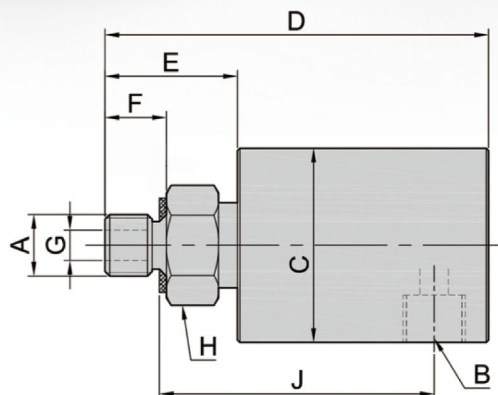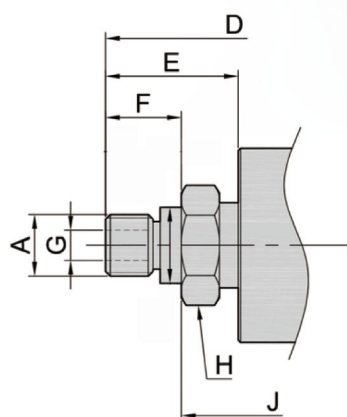

型号 Model	A	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm
MG035010	M10X1	G1/8	28.5	71	22	11	3.2	17	54
MG035014LH	G1/4LH	G1/4	41	81	28	13	6.4	22	58
MG035014RH	G1/4RH	G1/4	41	81	28	13	6.4	22	58
MG035038LH	G3/8LH	G3/8	44	99	26	16	8.7	24	71
MG035038RH	G3/8RH	G3/8	44	99	26	16	8.7	24	71
MG035012LH	G1/2LH	G1/2	57	114	35	19	12.7	30	79
MG035012RH	G1/2RH	G1/2	57	114	35	19	12.7	30	79
MG035034LH	G3/4LH	G3/4	73	122	34	19	17.5	36	94
MG035034RH	G3/4RH	G3/4	73	122	34	19	17.5	36	94
MG03501LH	G1LH	G1	83	150	42	22	25	36	108
MG03501RH	G1RH	G1	83	150	42	22	25	36	108

MG045-SERIES

单通道高压旋转接头

产品特点:


PRODUCT CHARACTERISTICS

- 特殊密封设计，密封性能好，无泄露，寿命长
- 双列高精度进口球轴承排列，运行平稳
- 适应多种设备，单一传送气 水 油等介质

工作参数:

WORKING PARAMETERS

- 通道数: 1进1出
- 最大正压: 40MPa
- 真空压力: -1.5KPa
- 最高转速: 120RPM
- 材质: 不锈钢/铝合金
- 工作温度: -40°C ~ +125°C

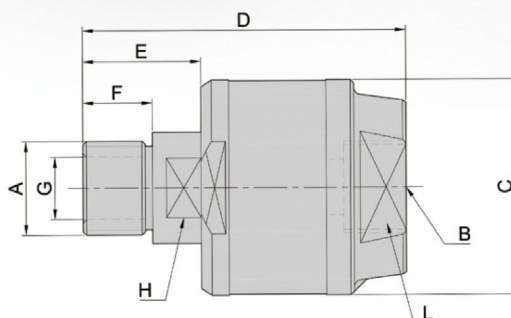

型号 Model	A - B	C mm	D mm	E mm	F mm	G mm	H mm	L mm
MG04514LH	G1/4	40	68	25	15	7	12	24
MG04514RH	G1/4	40	68	25	15	7	12	24
MG04538LH	G3/8	44	70	25	15	10	14	28
MG04538RH	G3/8	44	70	25	15	10	14	28
MG04512LH	G1/2	52	85	32	20	12	22	38
MG04512RH	G1/2	52	85	32	20	12	22	38
MG04534LH	G3/4	62	90	34	20	18	27	42
MG04534RH	G3/4	62	90	34	20	18	27	42
MG04501LH	G1	68	100	40	24	23	32	48
MG04501RH	G1	68	100	40	24	23	32	48
MG045114LH	G1-1/4	80	108	43	25	30	42	58
MG045114RH	G1-1/4	80	108	43	25	30	42	58
MG045112LH	G1-1/2	80	114	44	26	38	46	62
MG045112RH	G1-1/2	88	114	44	26	38	46	62

MG02250-SERIES

两通道旋转接头

产品特点:


PRODUCT CHARACTERISTICS

- 特殊密封设计，密封性能好，无泄露，寿命长
- 双列高精度进口球轴承排列，运行平稳
- 适应多种设备，输送水 气 油等介质

工作参数:

WORKING PARAMETERS

- 最高转速：250RPM
- 最高压力：150BAR
- 最高温度：185℃

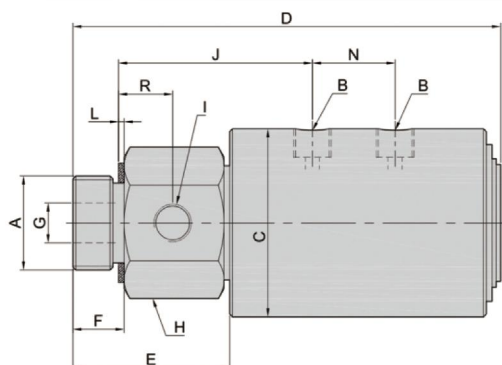

型号 Model	A	B	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	N mm	R mm
MG0225014	G1	PT1/4	66	150	55	18	8	46	1/4	68	29	19
MG02250114	G1-1/4	PT1/2	76	208	63	28	16	55	1/2	85	42	18
MG02250112	G1-1/2	PT3/4	88	226	66	30	20	65	3/4	89	49	19