



Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

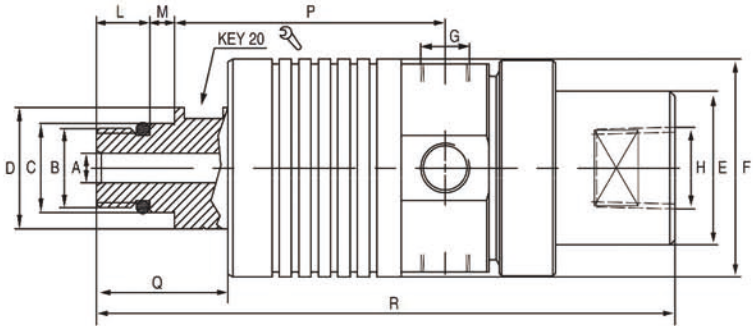

Type	A	B	C	D	E	F	G	H	L	M	P	Q	R	Weight (Kg)
GFP	6	M16 X 1,5 LH	18g6	24,5	31	44	1/8" BSP	3/8" BSP	11	5	55,5	27	118,6	0,50
GFP	6	5/8" - UNF LH	16,650/16,645	24,5	31	44	1/8" BSP	3/8" NPT	14	5	55,5	30	121,6	0,50

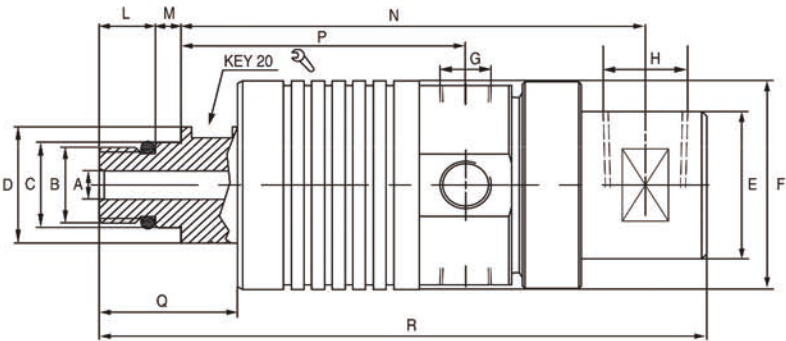


Type	A	B	C	D	E	F	G	H	L	M	N	P	Q	R	Weight (Kg)
GFPA	6	M16 X 1,5 LH	18g6	24,5	31	44	1/8" BSP	3/8" BSP	11	5	90,6	55,5	27	118,6	0,50
GFPA	6	5/8" - UNF LH	16,650/16,645	24,5	31	44	1/8" BSP	3/8" NPT	14	5	90,6	55,5	30	121,6	0,50

技术参数:
介质: 气
最高转速: 10000RPM
最高温度: 90° C
最大压力: 8BAR

介质: 冷却液
最高转速: 15000RPM
最高温度: 90° C
最大压力: 150BAR

THIRD ANGLE PROJECTION:



Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDENY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDENY.

TOLERANCE EXCEPT AS NOTED x.x ± .125 x.xx ± .015 x.xxx ± .0005 ANGLES ± .5°
SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE
SHAFT MEL/PLTING: CARBON STL BLK OXIDE

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER: STOCK

P/N:	REV: A 4
------	----------