



Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

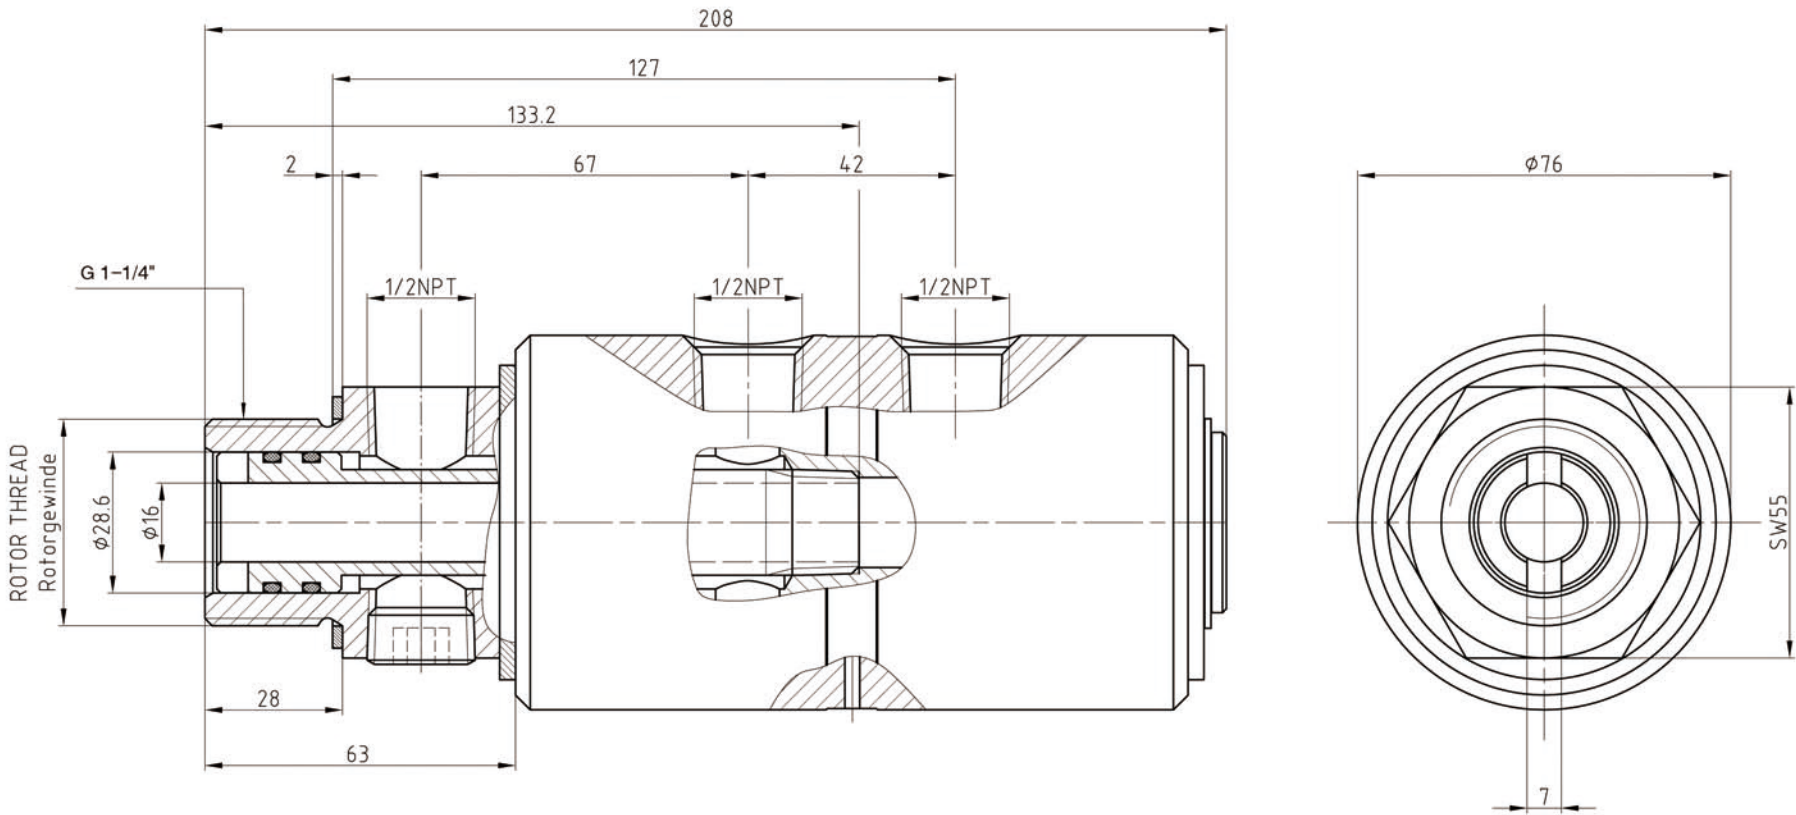

技术参数：
最高转速：250RPM
最高温度：125℃
工装压力：200BAR
介质：水 油

THIRD ANGLE PROJECTION:



			Drawn	JSM	6/2/03	TOLERANCE <u>EXCEPT AS NOTED</u> x.x ±.125 x.xx ± 0.15 x.xxx ± 0.005 ANGLES ± 0.5°	HIDNEY <u>深圳市欣德利机电设备有限公司</u> TEL:0755-27222664
			Checked	PJE	13/43/05		
			Checked	PJE	11/36/08		
CUSTOMER APPROVAL/DATE:							
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY						SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE	CUSTOMER: STOCK
						SHAFT MEL/PLTING: CARBON STL BLK OXIDE	P/N: REV: A 4