


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



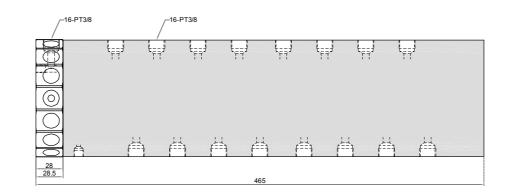



技术参数:

最高转速:80RPM 最高温度: 185 °C 最大压力: 350BAR 介质:液压油水

	Drawn	JSM	6/2/03	
ſ	Checked	PJE	13/43/05	
ſ	Checked	PJE	11/36/08	

TOLERANCE EXCEPT AS NOTED ±.125 X.X

± 0.15 X.XX $x.xxx \pm 0.005$

ANGLES ± 0.5° SHAFT MEL/PLTING:

CARBON STL 94-62 RC BLK OXIDE

CUSTOMER:

STOCK


深圳市欣德利机电设备有限公司

TEL:0755-27222664

P/N:

REV:

THIRD ANGLE PROJECTION:



CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING: THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNE

CARBON STL BLK OXIDE

A 4