


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



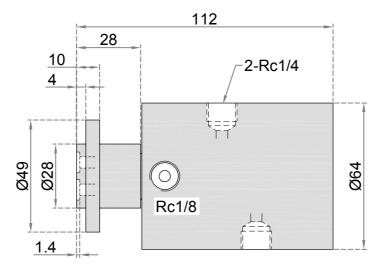



技术参数:

最高转速:4000RPM 最高温度:125°C 最大压力: 250BAR

HX > C	_	- / J	25001
介质	:	气	液压油

	Diawii	JSM	6/2/03		
	Checked	PJE	13/43/05		
	Checked	PJE	11/36/08		
CUSTOMER APPROVAL/DATE:					

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY

OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OF

PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNE

TOLERANCE EXCEPT AS NOTED ±.125 X.XX ± 0.15 x.xxx ± 0.005 ANGLES ± 0.5°

SHAFT MEL/PLTING: CARBON STL 94-62 RC

BLK SHAFT MEL/PLTING:

TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION

OXIDE

CARBON STL BLK OXIDE

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N: REV: A 4

