


## SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

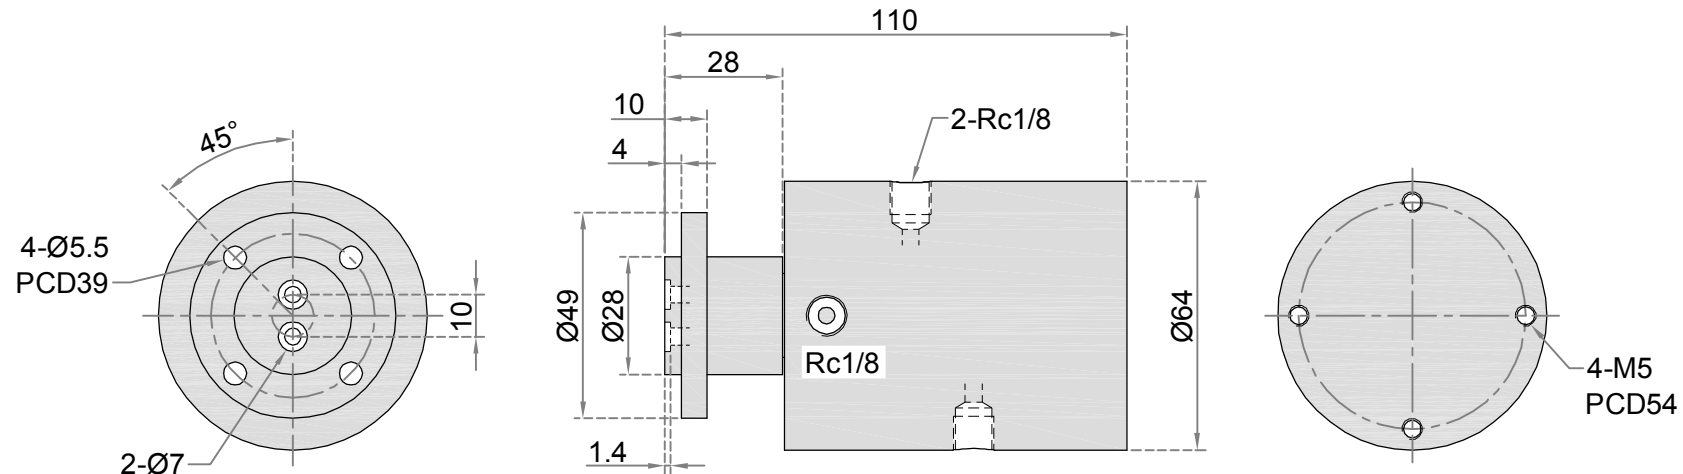

技术参数：


最高转速：4000RPM

最高温度：125℃

最大压力：250BAR

介质：气 液压油

THIRD ANGLE PROJECTION:



Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

TOLERANCE  
EXCEPT AS NOTED  
x.x ± .125  
x.xx ± 0.15  
x.xxx ± 0.005  
ANGLES ± 0.5°

SHAFT MEL/PLTING:

CARBON STL  
94-62 RC  
BLK OXIDE

SHAFT MEL/PLTING:

CARBON STL  
BLK OXIDE

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY  
TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDNEY) NO REPRODUCTION  
OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR  
PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

**HIDNEY**

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N:

REV:

A 4