


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



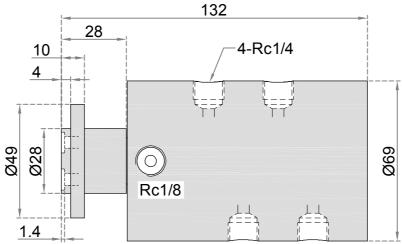



技术参数:

最高转速:4000RPM

最高温度:125°C

最大压力: 250BAR

介质:气液压油

THIRD ANGLE	E PROJECTION:
\triangle	
+((+))+	

Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY

PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

TOLERANCE **EXCEPT AS NOTED** X.X ±.125 X.XX ± 0.15 $x.xxx \pm 0.005$ ANGLES ± 0.5°

SHAFT MEL/PLTING: **CARBON STL** 94-62 RC BLK OXIDE

SHAFT MEL/PLTING: TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTIO OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR

CARBON STL BLK OXIDE

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N: REV: A 4