
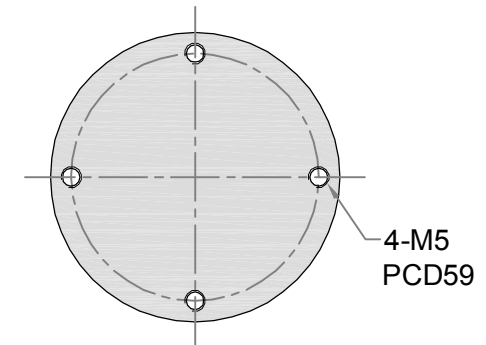
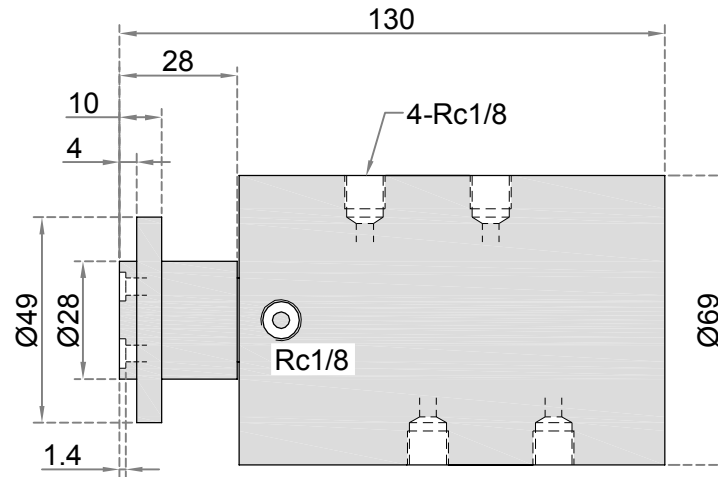


SHEET1

| Rev: | Date: | By | Chk | Description |
|------|----------|-----|-----|-------------|
| A.1 | 9/18/12 | PJE | RAW | EC0 0045 |
| A.2 | 10/06/12 | JWW | PJE | EC0 0192 |

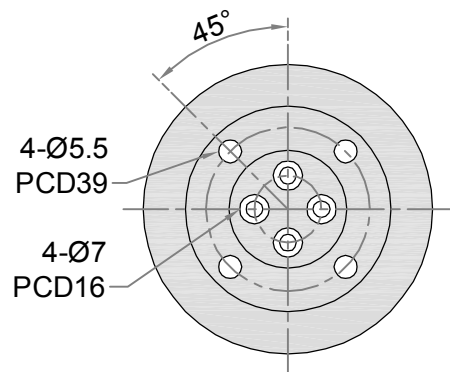

技术参数：
最高转速：4000RPM
最高温度：125℃
最大压力：250BAR
介质：气 液压油

| | | |
|---------|-----|----------|
| Drawn | JSM | 6/2/03 |
| Checked | PJE | 13/43/05 |
| Checked | PJE | 11/36/08 |

TOLERANCE
EXCEPT AS NOTED
x.x ±.125
x.xx ± 0.15
x.xxx ± 0.005
ANGLES ± 0.5°

SHAFT MEL/PLTING:
CARBON STL
94-62 RC
BLK OXIDE

SHAFT MEL/PLTING:
CARBON STL
BLK OXIDE

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:


STOCK

P/N:

REV:

A 4

THIRD ANGLE PROJECTION:



CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDNEY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY.