


# SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

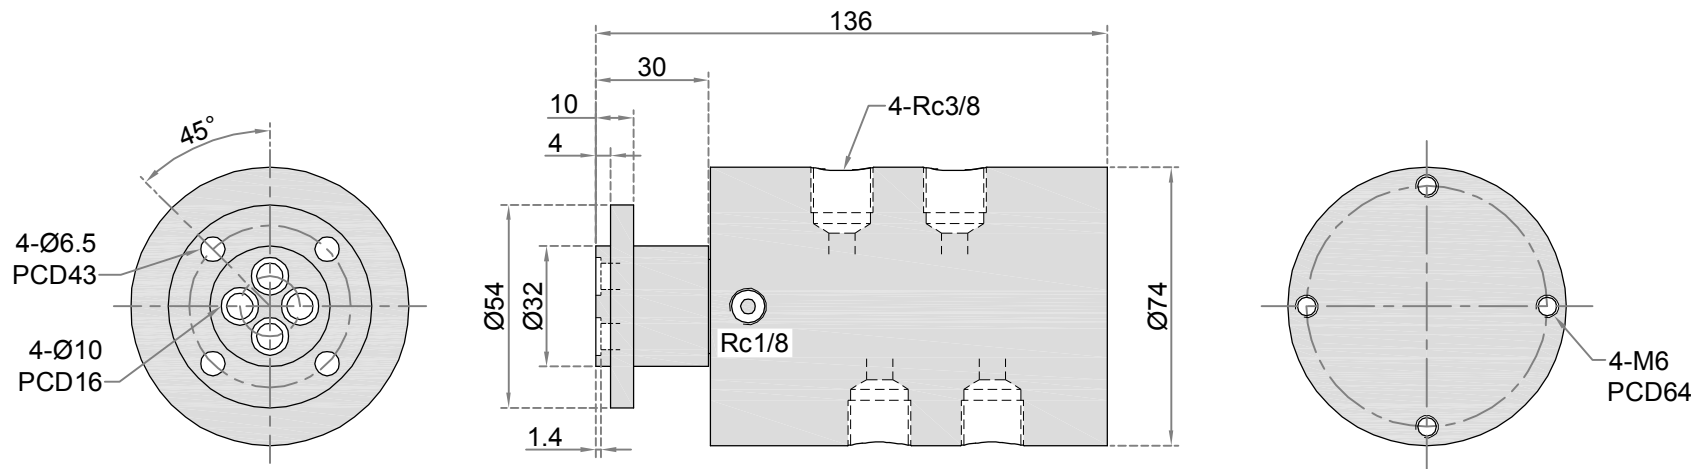

技术参数：  
最高转速：4000RPM  
最高温度：125℃  
最大压力：250BAR  
介质：气 液压油

Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

TOLERANCE  
EXCEPT AS NOTED  
x.x ± .125  
x.xx ± 0.15  
x.xxx ± 0.005  
ANGLES ± 0.5°

## HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:


STOCK

P/N:

REV:

A 4

THIRD ANGLE PROJECTION:



CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDNEY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

SHAFT MEL/PLTING:

CARBON STL  
94-62 RC  
BLK OXIDE

SHAFT MEL/PLTING:

CARBON STL  
BLK OXIDE