


# SHEET1

| Rev: | Date:    | By  | Chk | Description |
|------|----------|-----|-----|-------------|
| A.1  | 9/18/12  | PJE | RAW | ECO 0045    |
| A.2  | 10/06/12 | JWW | PJE | ECO 0192    |

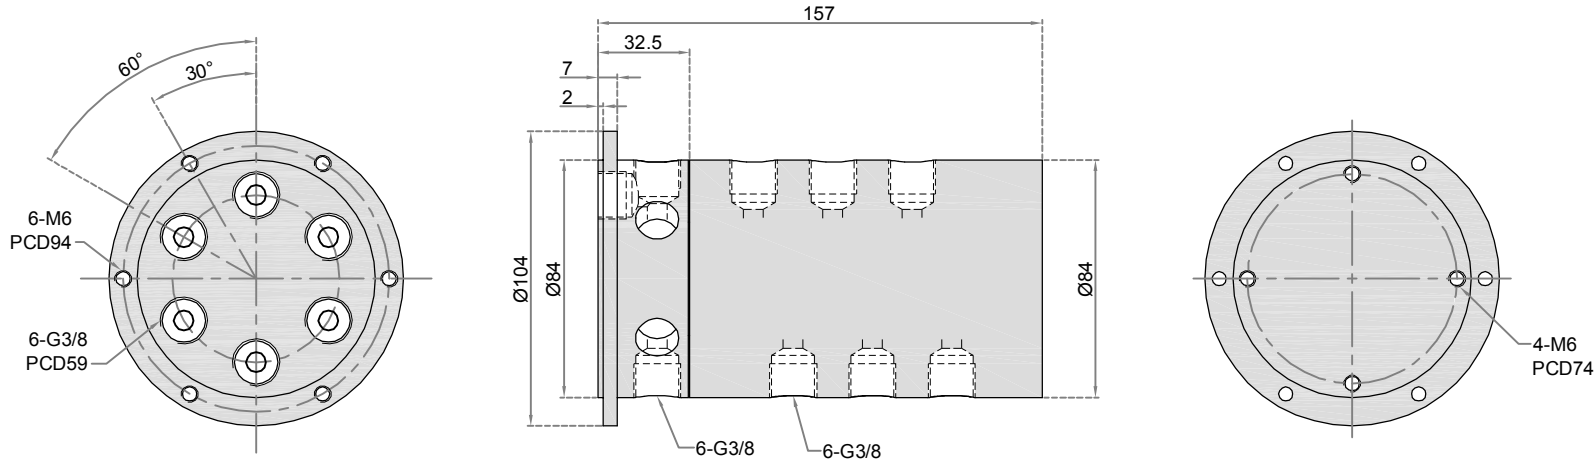

技术参数：  
最高转速：120RPM  
最高温度：125°C  
最大压力：10BAR  
介质：气 真空

|         |     |          |
|---------|-----|----------|
| Drawn   | JSM | 6/2/03   |
| Checked | PJE | 13/43/05 |
| Checked | PJE | 11/36/08 |

|                              |         |
|------------------------------|---------|
| TOLERANCE<br>EXCEPT AS NOTED |         |
| x.x                          | ±.125   |
| x.xx                         | ± 0.15  |
| x.xxx                        | ± 0.005 |
| ANGLES ± 0.5°                |         |
| SHAFT MEL/PLTING:            |         |
| CARBON STL                   |         |
| 94-62 RC                     |         |
| BLK OXIDE                    |         |

**HIDNEY**  
深圳市欣德利机电设备有限公司  
TEL:0755-27222664

CUSTOMER:  
**STOCK**

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDNEY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY.

|                   |  |
|-------------------|--|
| SHAFT MEL/PLTING: |  |
| CARBON STL        |  |
| BLK OXIDE         |  |

|      |             |
|------|-------------|
| P/N: | REV:<br>A 4 |
|------|-------------|

