



SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

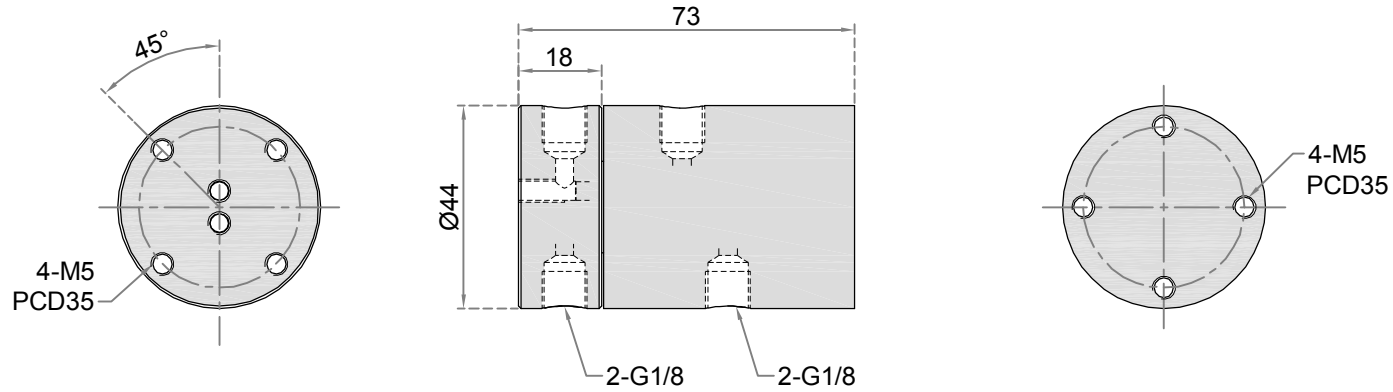

技术参数：
 最高转速：300RPM
 最高温度：125°C
 最大压力：10BAR
 介质：气 真空

THIRD ANGLE PROJECTION:



Drawn	JSM	6/2/03	TOLERANCE EXCEPT AS NOTED x.x ± .125 x.xx ± 0.15 x.xxx ± 0.005 ANGLES ± 0.5°	HIDNEY 深圳市欣德利机电设备有限公司 TEL:0755-27222664	
Checked	PJE	13/43/05			
Checked	PJE	11/36/08			
CUSTOMER APPROVAL/DATE:			SHAFT MEL/PLTING:	CUSTOMER:	
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDNEY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY.			CARBON STL 94-62 RC BLK OXIDE	STOCK	
			SHAFT MEL/PLTING:	P/N:	REV:
			CARBON STL BLK OXIDE		A 4