


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



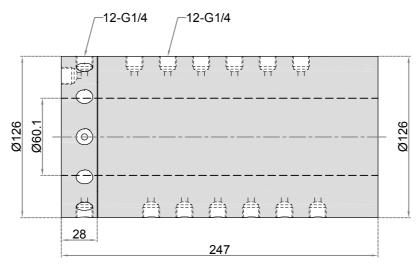




技术参数:

最高转速:50 RPM (可定制500RPM)

最高温度: 125 ℃ 最大压力: 10BAR 介质: 气真空



	Drawn	JSM	6/2/03
	Checked	PJE	13/43/05
	Checked	PJE	11/36/08

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY

OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR

PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

±.125 X.XX ± 0.15 x.xxx ± 0.005 ANGLES ± 0.5°

> SHAFT MEL/PLTING: **CARBON STL** 94-62 RC BLK OXIDE

TOLERANCE **EXCEPT AS NOTED**

SHAFT MEL/PLTING: TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION

CARBON STL BLK OXIDE

深圳市欣德利机电设备有限公司 TEL:0755-27222664

CUSTOMER:

STOCK

P/N: REV: A 4