


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



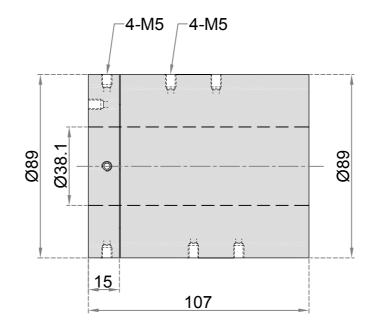



技术参数:

最高转速: 200RPM (可定制800RPM)

最高温度:125℃ 最大压力: 10BAR 介质: 气真空

THIRD ANGLE PROJECTION:					

	Drawn	JSM	6/2/03
	Checked	PJE	13/43/05
	Checked	PJE	11/36/08

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY

TO DYNAMIC SEALING TECHNOLOGIES. INS (HIDENY) NO REPRODUCTION

OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR

PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

TOLERANCE **EXCEPT AS NOTED** ±.125 X.X ± 0.15 X.XX $x.xxx \pm 0.005$ ANGLES ± 0.5° CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING: **CARBON STL**

> 94-62 RC BLK OXIDE SHAFT MEL/PLTING:

CARBON STL BLK OXIDE

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N: REV: A 4