


SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192



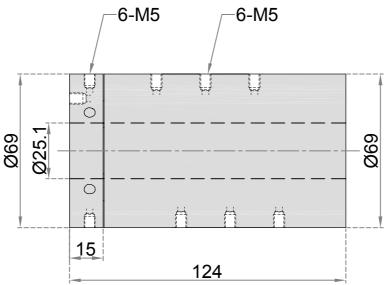



技术参数:

最高转速:200RPM(可定制800RPM)

最高温度: 125℃ 最大压力: 10BAR 介质: 气真空

THIRD ANGLE PROJECTION:						

				EVOEDT AC MOTED
	Checked	PJE	13/43/05	EXCEPT AS NOTED x.x ±.125
	Checked	PJE	11/36/08	$x.xx \pm 0.15$ $x.xxx \pm 0.005$
ROVAI	/DATE:	ANGLES ± 0.5°		

6/2/03

CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE

TOLERANCE

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY
TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION
OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OF
PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

Drawn

JSM

SHAFT MEL/PLTING:

CARBON STL BLK OXIDE

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N: REV:

A 4