

## SHEET1

Rev:	Date:	Ву	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

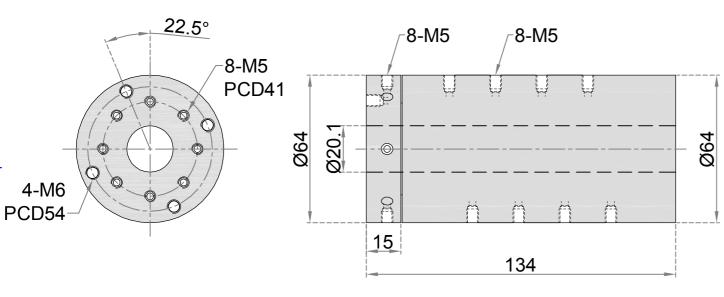




技术参数:

最高转速:100RPM(可定制500RPM)

最高温度:125°C 最大压力:10BAR 介质:气真空

THIRD ANGLE PROJECTION:	
1	



Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

CUSTOMER APPROVAL/DATE:

DDOVAL/DATE:

SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE

**TOLERANCE** 

 $x.xxx \pm 0.005$ 

ANGLES ± 0.5°

EXCEPT AS NOTED x.x ±.125

± 0.15

THIS DOCUMENT CONTAINS INFORMATION SHICH IS PROPRIETARY
TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION
OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN SHOLE OR
PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

SHAFT MEL/PLTING:

X.XX

CARBON STL BLK OXIDE

## HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27363464

CUSTOMER:

STOCK

P/N: REV: A 4