


SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

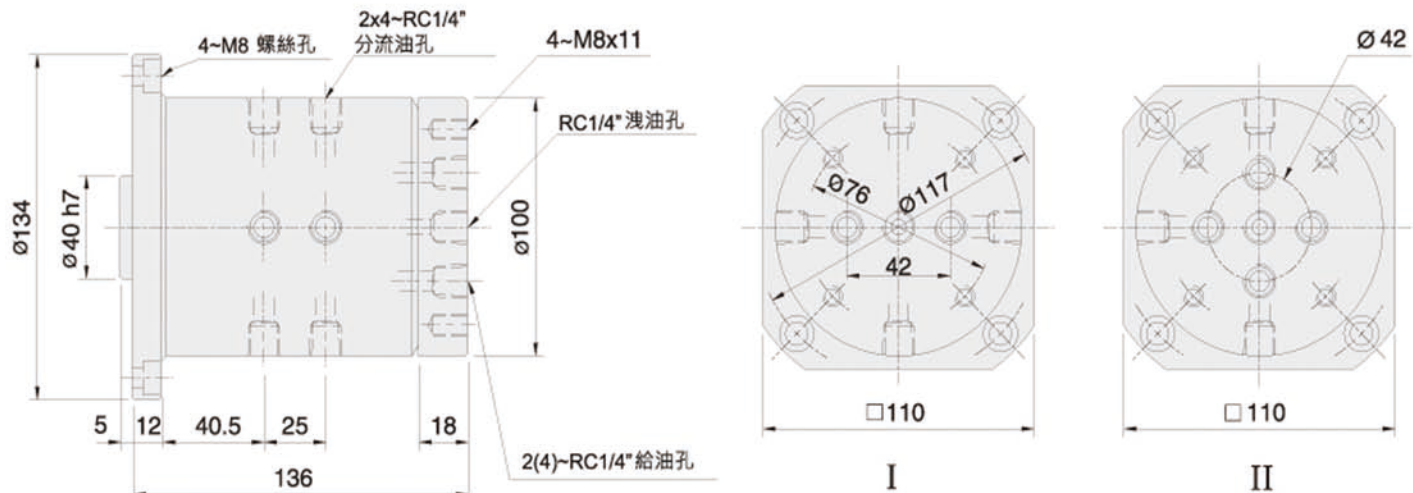

- 控制方式：
- 1: 单工位单独控制 型号后加-SC
 - 2: 相邻工位2工位控制 型号后加-CC
 - 3: 工位数量3 4 6 8 10 12工位可选


技术参数：

工作转速：150RPM

最高温度：125℃

最大压力：100Bar

介质：油



			Drawn	JSM	6/2/03	TOLERANCE <u>EXCEPT AS NOTED</u> x.x ±.125 x.xx ± 0.15 x.xxx ± 0.005 ANGLES ± 0.5°		HIDNEY <u>深圳市欣德利机电设备有限公司</u> TEL:0755-27222664			
			Checked	PJE	13/43/05						
			Checked	PJE	11/36/08						
CUSTOMER APPROVAL/DATE:						SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE				CUSTOMER: STOCK	
						SHAFT MEL/PLTING: CARBON STL BLK OXIDE					
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY						P/N:				REV: A 4	